




SIG PermaTEC

Hot melt waterproofing system

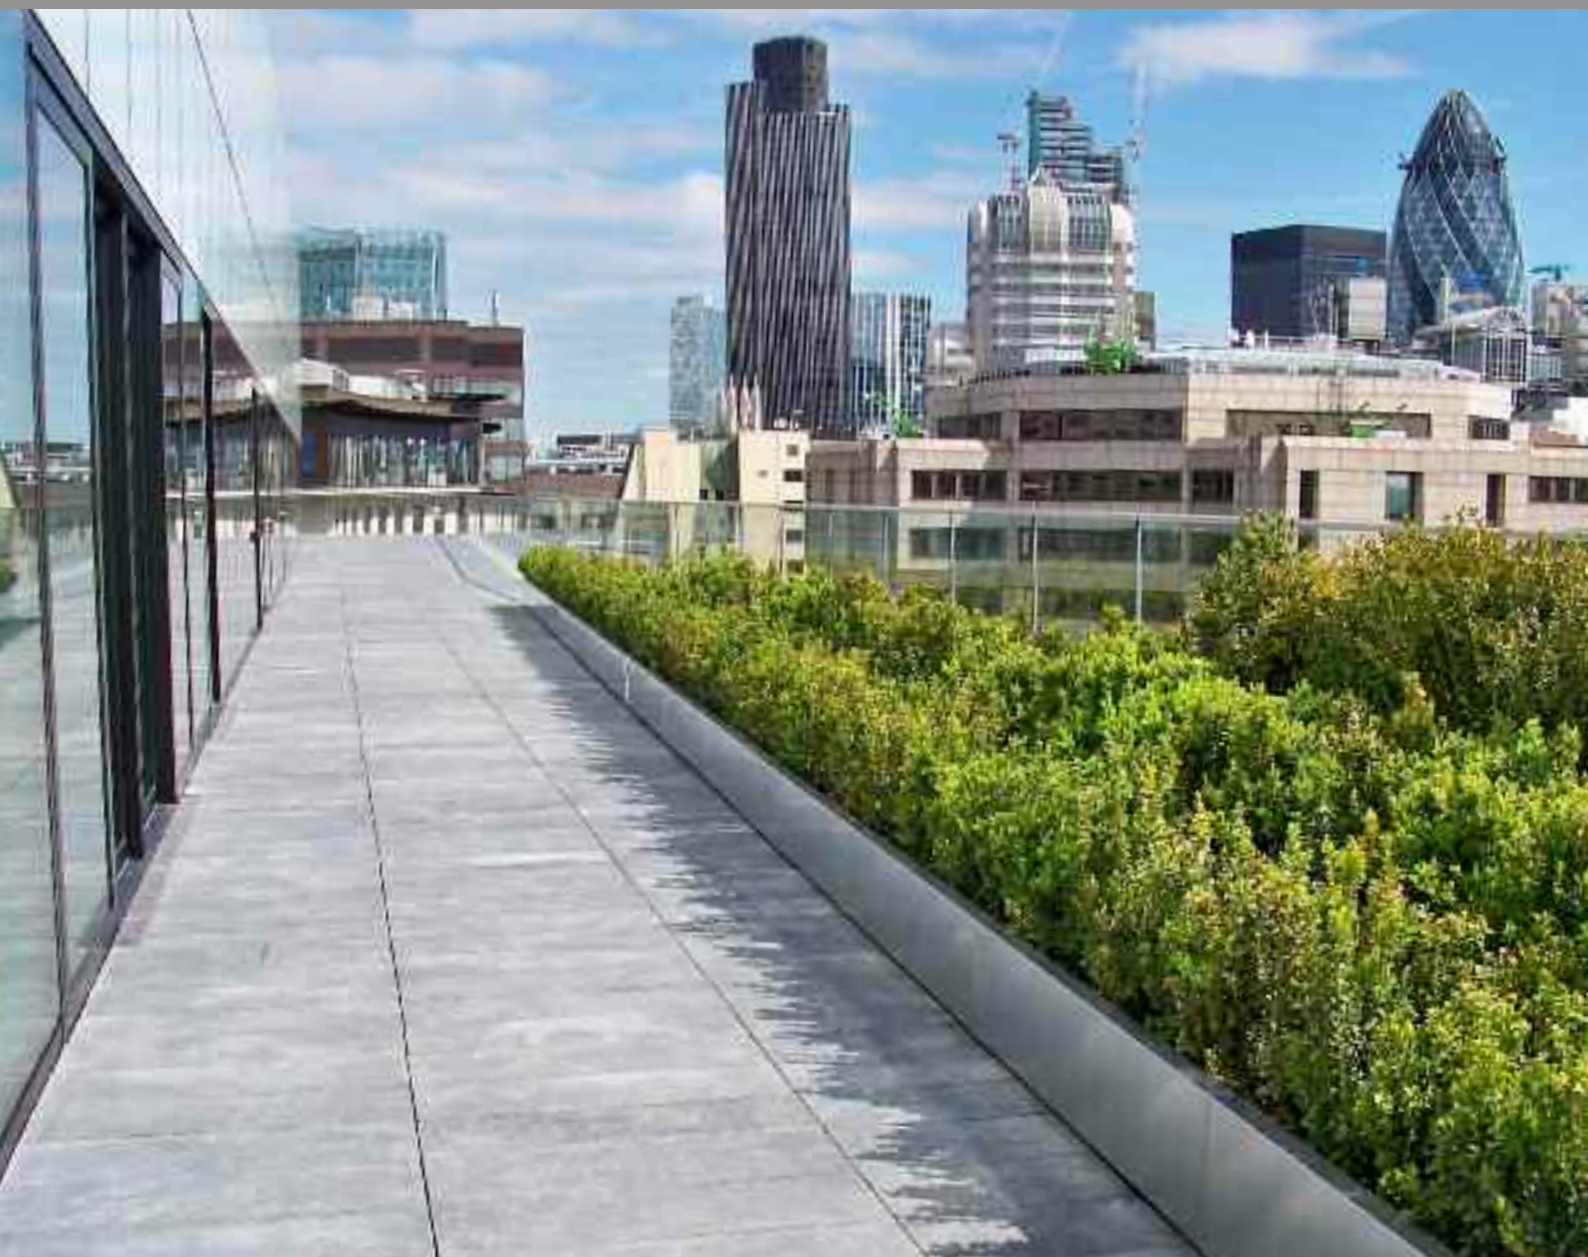

PermaTEC is a hot applied membrane which is manufactured in the UK by IKO. It is a specially formulated combination of refined bitumen, synthetic rubbers, fillers and other additives. It is melted in a purpose built machine and is applied to a prepared structural deck in two nominal 3mm coats, providing a monolithic waterproofing system. It is suitable for use as the waterproofing layer in most new build flat roofing applications, when covered by suitable protection or when used in an inverted roof or green roof specification.



Lifetime performance

- Formulated to last for the lifetime of the building or structure on which it is installed
- Long-term waterproofing integrity
- No future replacement costs

Fully bonded and monolithic

- Applied as a liquid directly to the deck
- No risk of water tracking below the membrane
- Completely seamless so no possibility of lap failure

Flexibility of design

- No screeds to falls required meaning less cost, weight and time
- Unaffected by standing water, dilute acids and fertilisers
- Effective detailing to difficult penetrations – 'I' beams, posts etc.

Safe, speedy installation

- No two part system to mix
- No on-site curing requirements
- Solvent-free formulation Ideal for demanding site conditions
- Excellent low temperature flexibility and adhesion
- Can be readily applied in temperatures down to -18°C on a clean, dry, frost-free surface
- Work can proceed during winter months, minimising lost construction time
- PermaTEC is not affected by rain, snow or frost immediately after its application
- Can be walked on immediately after installation of the system



4 simple components for the standard waterproofing system...



IKO permaTEC
Hot Melt Waterproofing System

1 Prime



PermaTEC High Penetration Primer

A specially formulated bitumen primer for use on concrete and other surfaces prior to the installation of the PermaTEC system.

Size: 25 litre drum

Coverage: 6-8m² per litre

2 Waterproof



PermaTEC ECOWRAP Compound

A specially formulated combination of refined bitumen, synthetic rubbers, fillers and other additions. It is hot applied to the prepared substrate using squeegees to a total nominal thickness of 6mm.

PermaTEC is covered by BBA Certificate No. 03/4009.

Size: 12kg in polypropylene wrapper

3 Reinforce



PermaFLASH-R

A 55g/m² polyester reinforcement sheet. PermaFLASH-R is installed between the 2 x 3mm coats of PermaTEC compound, to provide high tensile strength.

Roll size: 1m x 200m

4 Protect



PermaGUARD-F

A sand surfaced, polyester reinforced bitumen membrane.

PermaGUARD-F is installed as a protection layer into the final coat of the PermaTEC compound whilst it is still hot.

Roll size: 1m x 20m

Also available... a full range of accessories to cover every eventuality

- detailing
- green roofs
- drainage
- on-site protection



Making the roof work harder

Britain's population is predicted to grow by 10 million to 70 million by 2029. So, we cannot afford to 'waste' roof space. The fifth elevation can become an amenity to:

- Capture carbon
- Generate power
- Provide a green space and living zone
- Insulate the building
- Capture rainwater
- Provide a natural and bio-diverse, wildlife habitat

About SIG Design Technology

SIG Design Technology is a part of SIG Roofing, a leading division of SIG plc, a FTSE 250 listed company and the UK's market leading specialist supplier to professionals in the building and construction industry.

SIG Design Technology is at the forefront of design, supply and guaranteeing exclusive 21st century roofing solutions. Every component is carefully tested and selected for its sustainability, functionality, longevity and/or aesthetic strengths to guarantee total roofing solutions from inspiration to installation.



SIG Design Technology
Mannheim House
Gelders Hall Road
Shepshed
Leicestershire LE12 9NH

Tel: 08445 766 760
Fax: 08445 766 761

www.singleply.co.uk



IKO permaTEC
Hot Melt Waterproofing System