


Roof Design Rhenofol CV

Roof light connection
Roof light with integrated upstand
Non ventilated roof

Note:

The upstands must be approved by the manufacturer for this method of application, otherwise a separate perimeter fixing is required.

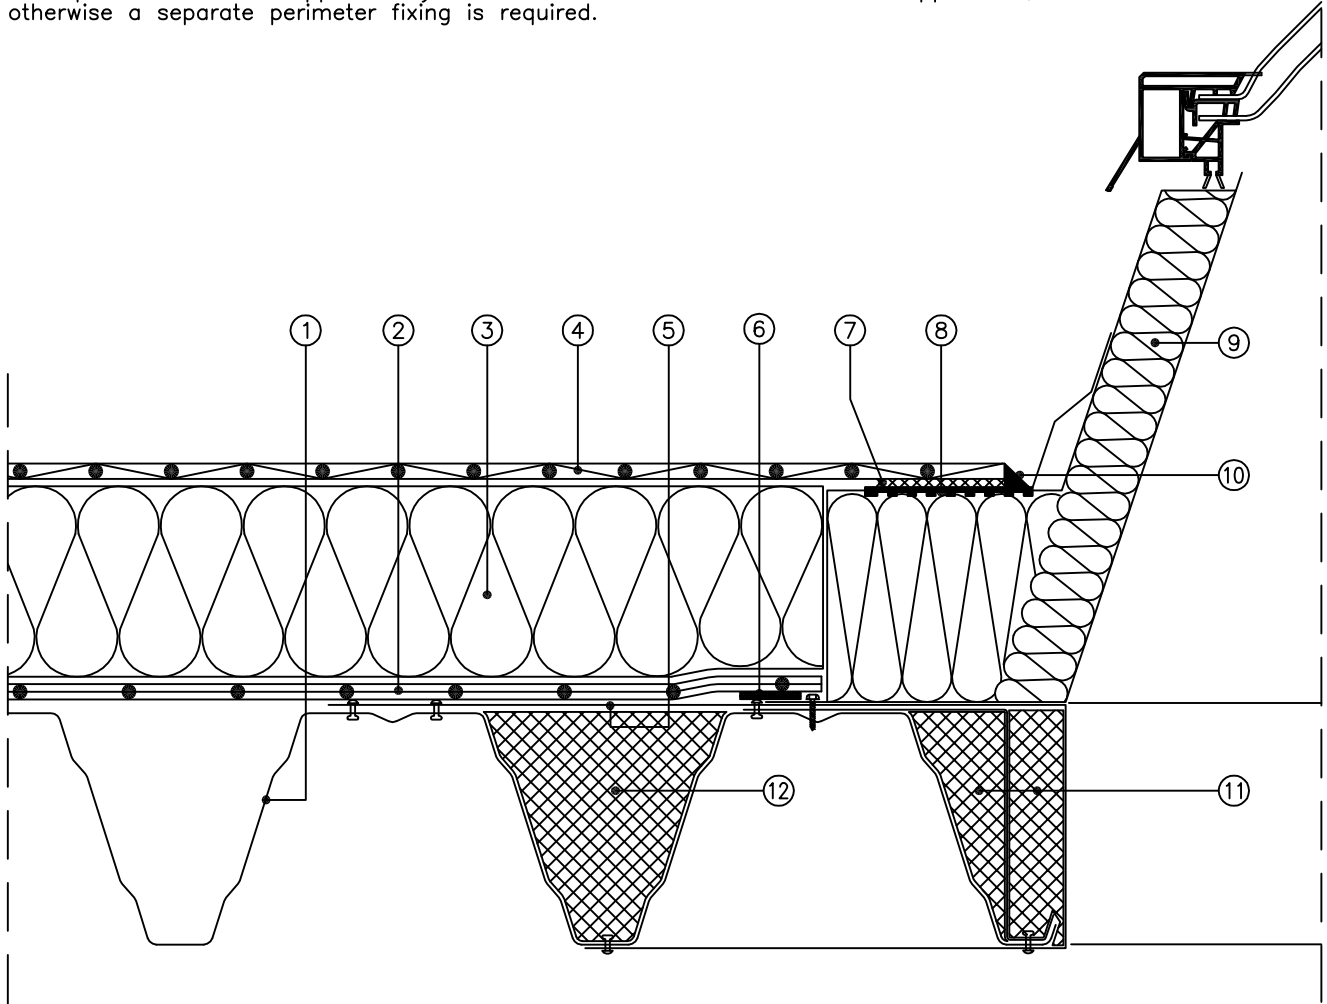

Scale 1:5 (The layers relevant to the sealing are shown accentuated)

- | | |
|-------------------------------------------------------|-----------------------------------------------------|
| ① Corrosion-protected profiled steel decking | ⑦ Welding |
| ② FDT vapour control layer PE | ⑧ Integrated rigid PVC strip |
| ③ Thermal insulation to specification | ⑨ Insulated roof light |
| ④ Roofing membrane Rhenofol CV | ⑩ Rhenofol paste |
| ⑤ Corrosion-protected steel angle | ⑪ Non-flammable thermal insulation fillet |
| ⑥ FDT connection tape for FDT vapour control layer PE | ⑫ Thermal insulation fillet, alternative to Pos. 11 |